

PRODUCT OVERVIEW

PRESSURE MEASUREMENT

MAC Sensor Co.,LTD.
Changsha City,Hunan,China
<http://www.macsensor.com>

TEL: +86-731-89975636 / 89975645

Micro Differential Pressure Transmitter DP825

PROFILE

DP825 is a micro-differential pressure transmitter that adopts silicon MEMS micro-pressure chip. It uses temperature compensation and digital calibration, which improves the temperature drift performance and product stability. With adopting temperature compensation, linear compensation, signal amplification, V/I conversion and other signal processing, this transmitter can output industrial standard signals, such as 4mA~20mA, RS485 and so on. Meanwhile it owns the functions of reverse polarity protection and anti-surge. Its product reliability is increased.



DP825 can measure the pressure or differential pressure of various dry and non-corrosive gases.

Features

- ☆ Accuracy: 0.5%F.S
- ☆ Advanced digital temperature compensation
- ☆ Strong RFI & EMI resistance
- ☆ Durable, >10 million load cycles
- ☆ Wide working temperature scope
- ☆ Wide measuring range
- ☆ Explosion-proof performance
- ☆ High stability, low drift
- ☆ Linear compensation supported
- ☆ Broad Compensated Temperature Range

APPLICATION


- ★ HVAC system
- ★ Fan operation detection
- ★ Medical
- ★ Chemical industry
- ★ Electricity
- ★ Pure plant
- ★ Building automation
- ★ Wind pressure measurement
- ★ Air purification equipment
- ★ Pipeline velocity test

SPECIFICATIONS

Ambient Temperature: 25°C (unless specified)

Parameter	DP825			
Pressure type	Differential pressure, gauge pressure			
Measuring range	0Pa~±100Pa, 500Pa ... 1000Pa; 0kPa~2kPa,10kPa ... 100kPa			
Accuracy	±1.0%F.S; ±0.5%F.S			
Electrical wire	2 wire	3 wire	4 wire	4 wire
Signal output	4mA~20mA	0.5V~4.5Vdc	I ² C	RS485
Power supply	12V~30Vdc	5V~30Vdc	3.3V~5Vdc	5V~30Vdc
Total current consumption	23mA max	<5mA	<1.3mA	<5mA
Electrical connection	Direct cable outlet, IP66			
Medium Temp.	-40°C~85°C			
Ambient temp.	-40°C~85°C			
Storage Temp.	-40°C~85°C			
Temp. compensation	0°C~50°C			
Atmospheric pressure	86kPa~106kPa			
Insulate resistance	>100M Ω @100V			
Load resistance	R=(U-12)/0.02-RD , U means supply, RD means cable resistance.			
Medium compatible	Non-corrosive gases			
Load resistance (Ω)	Current (2-wire): R≤(U-10)/0.02-RD (U: supply voltage, RD: cable internal resistance)			
Overload	200% F.S			
Vibration environment	10g (@10Hz~2000Hz)			
Impact resistance	100g/11ms			
Max static pressure	≤200kPa (related to the actual range of the product)			
Nonlinear(%F.S)	≤0.4,≤0.8			
Hysteresis(%F.S)	≤0.1,≤0.2			
Repeatability(%F.S)	≤0.1,≤0.2			
Long-term stability(%F.S/year)	≤0.5,≤1.0			
Zero temperature drift (%F.S/°C)	≤0.05,≤0.08			
Sensitivity temp. drift(%F.S/°C)	≤0.05,≤0.08			
Static pressure effect(%F.S/100kPa)	≤0.05			

DIMENSION AND DRAWING

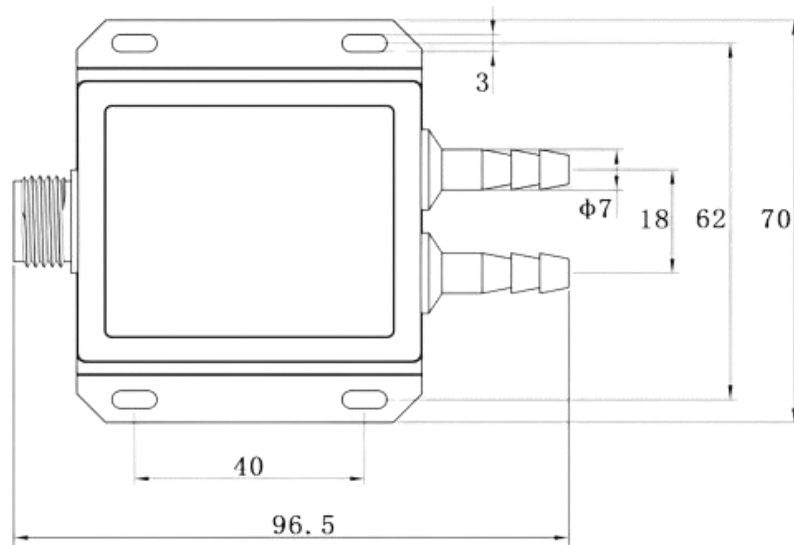

Unit: mm

Electrical Connections

Direct cable outlet

Diagram	Color	Current (2 wire)	Voltage (3 wire)	I ² C (4 wire)	RS485 (4 wire)
	Red	Vcc	Vcc	Vcc	Vcc
	Green	Iout	GND	GND	GND
	Yellow	/	Vout	SCL	RS485A
	Blue	/	/	SDA	RS485B
	Black	PE	PE	PE	PE